
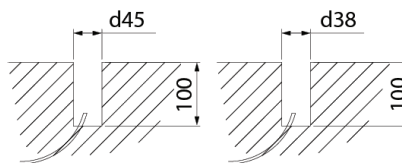




# MICRA

Ground recessed miniature LED IP67 "marker" type lights. It can withstand the load on the outer part up to 1330 kg.

## SPECIFICATION

Housing: Pressure die-cast aluminum alloy with polyester powder paint.  
 Fronted cover: stainless steel  
 Glass: Tempered glass, T= 8 mm  
 Beam angles:  
 symmetric 12,5°, 20°, 30°, 45°, 120°  
 Housing color: Black, Metallic, RAL  
 Color temperature, K: 3000K-6000K, RGB  
 Control system: Switch On\Off  
 Input voltage, V: 12V, 24V, 220V  
 Ingress Protection Rating, IP: IP67  
 Operating temperature: -25°C ~ +50°C  
 Guaranteed lifetime, hours: 50 000h



With embedded parts

Not with embedded parts

| Article   | Name                      | Power, W | Dimensions, mm | Input voltage, V | Beam angle, degree         | Color temperature, K | Weight, kg |
|-----------|---------------------------|----------|----------------|------------------|----------------------------|----------------------|------------|
| 766003010 | MICRA 0,5W WW 12V IP67    | 0,5W     | d30x47         | 12V              | 120°                       | 3000K-6000K          | 0.1kg      |
| 766003012 | MICRA 0,5W CW 12V IP67    | 0,5W     | d30x47         | 12V              | 120°                       | 3000K-6000K          | 0.1kg      |
| 766003013 | MICRA 0,5W WW 24V IP67    | 0,5W     | d30x47         | 24V              | 120°                       | 3000K-6000K          | 0.1kg      |
| 766003015 | MICRA 0,5W CW 24V IP67    | 0,5W     | d30x47         | 24V              | 120°                       | 3000K-6000K          | 0.1kg      |
| 766002010 | MICRA 2W Single 12V IP67  | 2W       | d50x52         | 12V              | 12,5°, 20°, 30°, 45°, 120° | 3000K-6000K          | 0.15kg     |
| 766002020 | MICRA 2W RGB 12V IP67     | 2W       | d50x52         | 12V              | 12,5°, 20°, 30°, 45°, 120° | RGB                  | 0.15kg     |
| 766002030 | MICRA 2W Single 24V IP67  | 2W       | d50x52         | 24V              | 12,5°, 20°, 30°, 45°, 120° | 3000K-6000K          | 0.15kg     |
| 766002040 | MICRA 2W RGB 24V IP67     | 2W       | d50x52         | 24V              | 12,5°, 20°, 30°, 45°, 120° | RGB                  | 0.15kg     |
| 766002050 | MICRA 2W Single 220V IP67 | 2W       | d50x52         | 220V             | 12,5°, 20°, 30°, 45°, 120° | 3000K-6000K          | 0.15kg     |
| 766002060 | MICRA 2W RGB 220V IP67    | 2W       | d50x52         | 220V             | 12,5°, 20°, 30°, 45°, 120° | RGB                  | 0.15kg     |