




OUTLED PRO S

High-power model is designed for lighting large areas or motorways. Searchlights power up to 55W are perfect for parks and areas for office centers. If necessary - change drivers "in situ", without tools and removal of the device due to a special slot on the motherboard drivers and mount the housing cover to snap. The driver and all the details are hidden in the hulls, which is easy to open and make commissioning. Anchoring and installation of street lamp is possible in both the vertical and horizontal position by turning the fitting element.

SPECIFICATION

Housing: Pressure die-cast aluminum alloy with polyester powder paint
Beam angles:
 symmetric 30°, 60°, 120°, 50x150°
 asymmetric 50x150°
Housing color: Black, gray
Color temperature, K: 2700K - 6000K
Control system: Switch On\Off
Input voltage, V: 220V
Ingress Protection Rating, IP: IP66
Color rendering index, Ra: >70
Lighting efficiency: >110 Lm/W
Power factor (PF): >0.90
Operating temperature: -35°C ~ +50°C
Guaranteed lifetime, hours: 50 000h

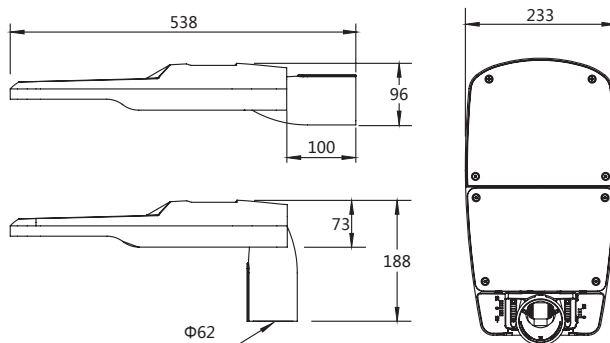

Article	Name	Power, W	Dimensions, mm	Luminousefficiency, lm/W	Colortemperature, K	Beam angles, degrees	Input voltage, V	Weight, kg
901055005	OUTLED PRO S 40W	40W	538x233x96	>110	2700K-6000K	30°, 60°, 120°, 50x150°	220V	3,8
901055004	OUTLED PRO S 55W	55W	538x233x96	>110	2700K-6000K	30°, 60°, 120°, 50x150°	220V	4



OUTLED PRO M

High-power model is designed for lighting large areas or motorways. Searchlights power up to 120W are perfect for parks and areas for office centers. If necessary - change drivers "in situ", without tools and removal of the device due to a special slot on the motherboard drivers and mount the housing cover to snap. The driver and all the details are hidden in the hulls, which is easy to open and make commissioning. Anchoring and installation of street lamp is possible in both the vertical and horizontal position by turning the fitting element.

SPECIFICATION

Housing: Pressure die-cast aluminum alloy with polyester powder paint

Beam angles:

symmetric 30°, 60°, 120°, 50x150°

asymmetric 50x150°

Housing color: Black, gray

Color temperature, K: 2700K - 6000K

Control system: Switch On\Off

Input voltage, V: 220V

Ingress Protection Rating, IP: IP66


Color rendering index, Ra: >70

Lighting efficiency: >110 lm/W

Power factor (PF): >0.90

Operating temperature: -35°C ~ +50°C

Guaranteed lifetime, hours: 50 000h

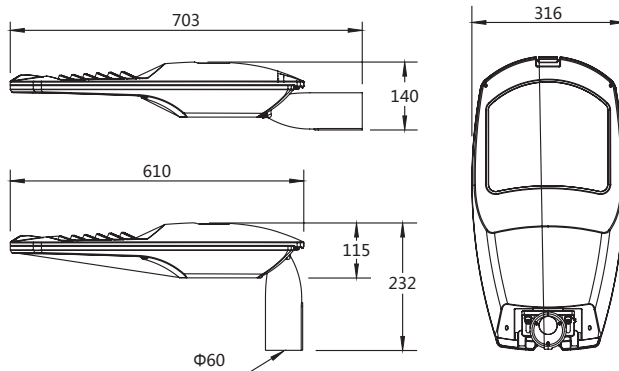

Article	Name	Power, W	Dimensions, mm	Luminous efficiency, lm/W	Color temperature, K	Beam angles, degrees	Input voltage, V	Weight, kg
901075003	OUTLED PRO M 75W	75W	610x316x115	>110	2700K-6000K	30°, 60°, 120°, 50x150°	220V	7,1
901100002	OUTLED PRO M 100W	100W	610x316x115	>110	2700K-6000K	30°, 60°, 120°, 50x150°	220V	7,1
901120001	OUTLED PRO M 120W	120W	610x316x115	>110	2700K-6000K	30°, 60°, 120°, 50x150°	220V	7,1